

SPECIFICATIONS:

DESCRIPTION

Wall-mounted sconce featuring handcrafted glass.

MOUNTING

Installs directly to a 4" octagonal outlet box, centered on fixture.
75°C supply wire required for incandescent lamping.

LAMPING

Standard is 1x 75W A19 120V incandescent, with optional compact fluorescent configurations.

CONSTRUCTION

Triangle shaped, stamped aluminum fitter (8.75"W x 7"H x 0.7"D) is powder coated white. Glass is secured by stainless steel set screws.

DIFFUSER

Blown glass diffuser is available in various decors.

LABELS

UL listed. Suitable for Wet Locations.*



ORDERING:





Fixture/Decor

(Lamping Option)

243507	Opal	(blank)	Incandescent
243552	Marble	A1	1x 9W Quad Mag 120V
243582	Graphite	B1	1x 13W Quad Mag 120V
243583	Mocha	D1	1x 13W Quad 120V
		M1	1x 13W Quad 277V

2435:

1x 75W A19 Lamp

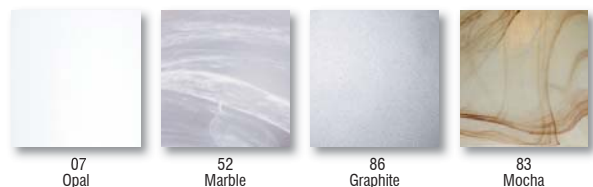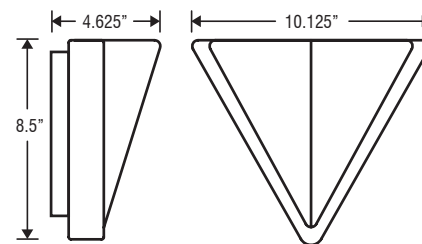

*Luminaires suitable for Wet Locations should not be used inside shower or tub areas, unless specifically approved by local authorities.

Project Information:

Glass dimensions provided are nominal. Allowance must be made for dimensional tolerance in handcrafted glasses.

REVISED 10/08