

location:  
**DAMP**  
interior

**SPECIFICATIONS:**

**DESCRIPTION**

Wall-mounted ADA-compliant sconce featuring open-ended handcrafted glass.

**LAMPING**

Standard is 75W A19 120V incandescent, suitable for dimming.

**CFL:** 18W 4-Pin CFL with non-dimming electronic ballast.

**SB-CFL:** Self-ballasted GU-24 lampholders. 18W max, 120V.

Lamps not included.

**LED:** 6.7W LED lightsource integrated onto the sconce backplate. 120V. See next page for more information.

**DIFFUSER**

Diffuser shall be handcrafted glass of various decors.

**CONSTRUCTION**

Glass is secured to the backplate by braided wire.

Rectangular backplate (nominal 4"W x 6.5"H) shall be constructed of steel, powder-coated white.

**METAL FINISH**

Decorative metal accents shall be in various finish options.

**MOUNTING**


Installs directly to a 4" octagonal outlet box. 75°C supply wire required for incandescent lamping. Top of glass is approximately 3.625" above the outlet box centerline.

**LABELS**

UL or ETL Listed. Suitable for Damp Locations (interior use only).



704307-SN  
Opal Matte

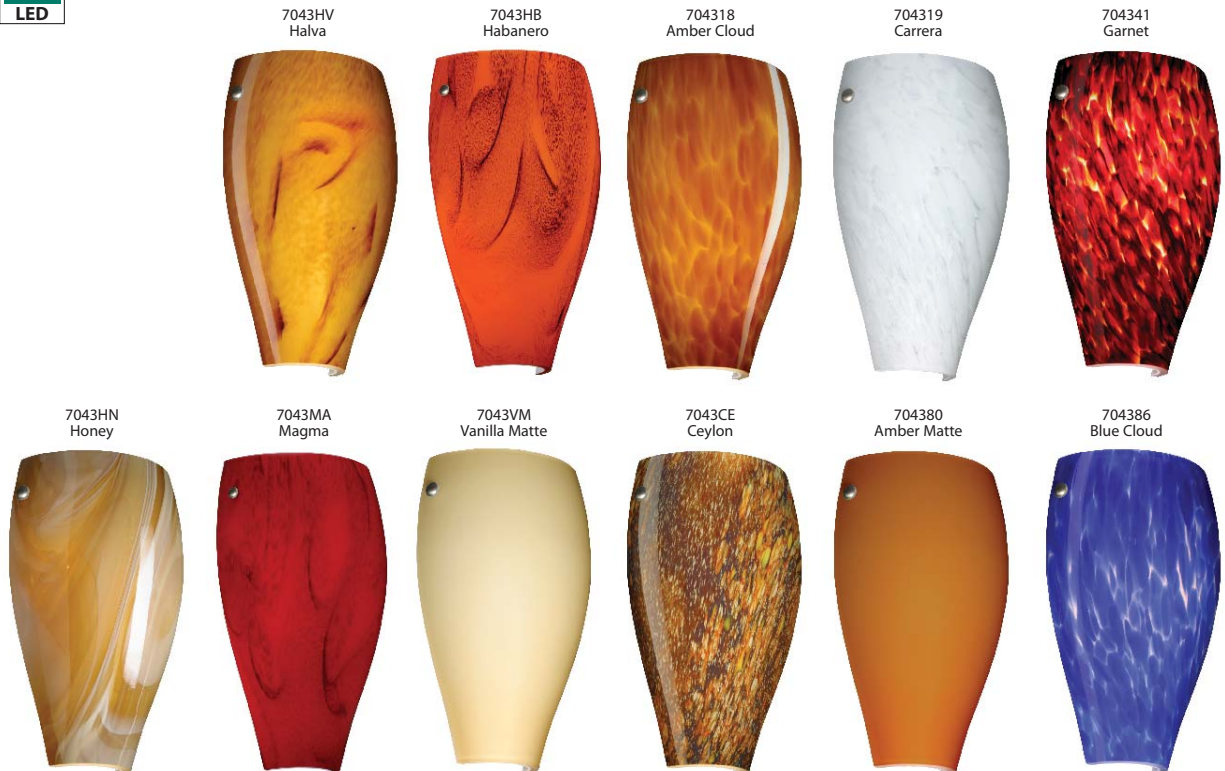


**For ordering information, see next page**

All dimensions provided are nominal. Allowance must be made for dimensional tolerance in handcrafted glasses.

**REV 12/11**

**ORDERING:**

Fixture/Decor	Lamping Options	Metal Finish
<b>704307</b> Opal Matte	<b>(blank)</b> 1x 75W A19 Incan.	<b>BK</b> Black
<b>704318</b> Amber Cloud	<b>LED5</b> 5W LED	<b>BR</b> Bronze
<b>704319</b> Carrera	<b>E1</b> 1x 18W Quad 120V	<b>PN</b> Polished Nickel
<b>704341</b> Garnet	<b>N1</b> 1x 18W Quad 277V	<b>SN</b> Satin Nickel
<b>704380</b> Amber Matte	<b>W1</b> 1x 18W GU-24 max	<b>WH</b> White
<b>704386</b> Blue Cloud		
<b>7043CE</b> Ceylon		
<b>7043HB</b> Habanero		
<b>7043HN</b> Honey		
<b>7043HV</b> Halva		
<b>7043MA</b> Magma		
<b>7043VM</b> Vanilla Matte		



**Project Information:**

**Besa LED Sconces:**

- LED lightsource, constant-current driver and heat-sink built onto backplate as a unit for easy replacement
  - Design that properly manages heat at the lightsource, maximizing the long life potential of the LEDs
  - Dimmable with electronic low-voltage dimmers (ELV)\*
  - Total power of 6.7W
  - Total Lumen Output: 420
  - Lumens Per Watt (LPW): 62
  - CCT: 3000K
  - CRI: >85
  - 120V input only
  - R9 Red Color Value of 50
  - Rated Life: 50,000 hours, based on LM70
  - Contact factory for LED Lightsource and Driver warranty, or for 277V options
- \* Consult factory for compatible dimmer information.