## FIXTURE INSTALLATION GUIDE


Model 1WP Series (One Light Wall Pendant 120V)



6695 Taylor Rd. Blacklick, OH 43004 www.besalighting.com

1WP, Rev.1 9-16



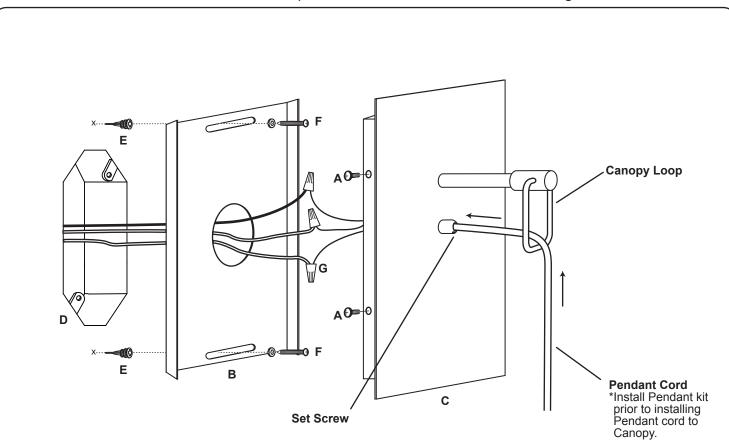

- 1. Carefully unpack parts. Loosen Canopy Screws (A) to release the Mounting Plate (B) from Canopy (C).
- 2. Place Mounting Plate (B) over Outlet Box (D) and mark placement for Wall Anchors (E) in the top and bottom slotted opening of the Mounting Plate (B). Remove the Mounting Plate (B) and install Wall Anchors (E) to the wall.
- 3. Pull the House Supply Wires though the circular opening of the Mounting Plate (B) and then install Mounting Plate (B) to the Wall Anchors (E) with the Washers and Wood Screws (F).
- 4. Install Pendant Kit to Pendant Cord (see Glass Shade Installation Guide) then Feed Pendant Cord into the Canopy Loop and then into the Canopy (C). Connect the Pendant Cord Wires to the House Supply wires as follows: Green Stripe to House Supply Ground, White Stripe to House Supply White, and Clear to Black and secure with Wirenuts (G) provided.

**NOTE:** To adjust Pendant Cord height by loosen the Set Screw on Canopy, then lower/raise to desired height and tighten the Set Screw. Do not overtighten.

- 5. Install the Canopy (C) onto the Mounting Plate (B) by aligning the Canopy (C) over the Mounting Plate (B) and installing the Canopy Screws (A).
- 6. Proceed to the Pendant Glass Shade installation guide.

## **GLASS SHADE INSTALLATION GUIDE**

Model E Series 310 and 315 (Medium Base Pendant Set 120V)




E310,315.96, Rev.1 8-17

6695 Taylor Rd. Blacklick, OH 43004 www.besalighting.com

## **IMPORTANT:** For installation of pendants and wiring, please refer to the **Fixture Installation Guide** included with fixture canopy

- 1. Prior to installing the pendant cord into the ceiling canopy, slide the Decorative Sleeve over the cord. The pendant can now be installed per the FIXTURE INSTALLATON GUIDE.
- 2. Position the Socket through the top opening of the Glass Shade and install Glass Shade onto socket with Check Ring. Install bulb per label on luminaire.
- 3. Install Threaded Inner Glass. Restore power.

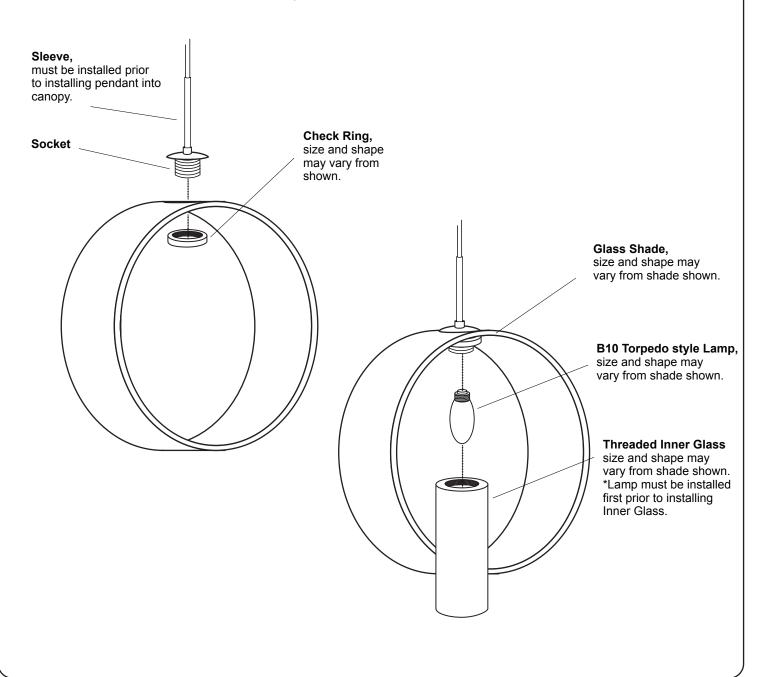

All electrical connections and the installation of this fixture must be in agreement with local codes, ordinances or the NEC (National Electric Code) or CEC (Canadian Electrical Code). Do not connect this fixture to an electrical system that does not provide a means for equipment grounding.