



GLEEM 12 / 16

FLUSH MOUNT CEILING

location:
DAMP

SPECIFICATIONS:

DESCRIPTION

Flush-mounted ceiling fixture, featuring handcrafted glass.

LAMPING

Standard: 60W A19 Medium-based 120V incandescent, lamp not included.
Dimmable with standard incandescent dimmer (not included).

LED: 17W Integrated source, 120V, CL dimmable, 90+ CRI, 3000°K CCT, 1200 lumens, 30,000 hours, included. (For Gleem 12 only)

LED: 28W Integrated source, 120V, CL dimmable, 90+ CRI, 3000°K CCT, 2160 lumens, 30,000 hours, included. (For Gleem 16 only)

DIFFUSER

Handcrafted glass diffuser in Opal Glossy with Clear crystals fused to bottom center.

Gleem 12: 12.5" Dia. x 4.25" H

Gleem 16: 15.75" Dia. x 5.25" H

CONSTRUCTION

Stamped aluminum fitter is powder coated white.

MOUNTING

Installs directly to a 4" octagonal outlet box, centered on fixture.
90°C supply wire required for incandescent lamping.

LABELS

UL or ETL Listed. Suitable for Damp Locations (interior use only).



GLEEM CEILING SHOWN IN OPAL GLOSSY/CLEAR



GLEEM SHOWN LIT

For ordering information, see next page


All dimensions provided are nominal.
Allowance must be made for dimensional tolerance in handcrafted glasses.

REV 12/18




ORDERING:

Gleem 12:

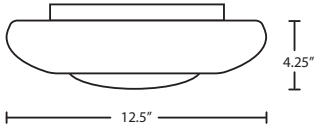

FIXTURE/DECOR	LAMP OPTIONS
GLEEM12CLC 12.5" Opal Glossy/Clear	(blank) 2x 60W A19 Incan LED 17W LED, 1200 lumens

Gleem 16:

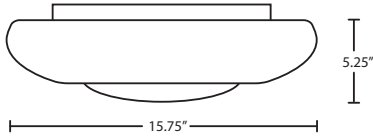

FIXTURE/DECOR	LAMP OPTIONS
GLEEM16CLC 15.75" Opal Glossy/Clear	(blank) 3x 60W A19 Incan LED 28W LED, 2160 lumens

Ex. GLEEM12CLC
Gleem 12 Ceiling, Clear Glass,
Satin Nickel Finish

Project Information: