



GLEEM 12 / 16

FLUSH MOUNT CEILING

location:
DAMP

SPECIFICATIONS:

DESCRIPTION

Flush-mounted ceiling fixture, featuring handcrafted glass.

LAMPING

Standard: 60W A19 Medium-based 120V incandescent, lamp not included.

Dimmable with standard incandescent dimmer (not included).

GU24 CFL: Self-ballasted GU24 lampholders, 13W max, 120V, lamp not included.

LED: 16W Integrated source, 120V, dimmable, 85+ CRI, 3000°K CCT, 1600 lumens, 30,000 hours, included. (For Gleem 12 only)

LED: 20W Integrated source, 120V, dimmable, 85+ CRI, 3000°K CCT, 2200 lumens, 30,000 hours, included. (For Gleem 16 only)

DIFFUSER

Handcrafted glass diffuser in Opal Glossy with Clear crystals fused to bottom center.

Gleem 12: 12.5" Dia. x 4.25" H

Gleem 16: 15.75" Dia. x 5.25" H

CONSTRUCTION

Stamped aluminum fitter is powder coated white.

MOUNTING

Installs directly to a 4" octagonal outlet box, centered on fixture.

90°C supply wire required for incandescent lamping.

LABELS

UL or ETL Listed. Suitable for Damp Locations (interior use only).



GLEEM CEILING SHOWN IN OPAL GLOSSY/CLEAR



GLEEM SHOWN LIT

For ordering information, see next page


All dimensions provided are nominal.
Allowance must be made for dimensional tolerance in handcrafted glasses.

REV 1/17




ORDERING:

Gleem 12:

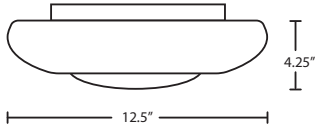

| FIXTURE/DECOR | LAMP OPTIONS |
|---|--|
| GLEEM12CLC 12.5" Opal Glossy/Clear | (blank) 2x 60W A19 Incan GU24 2x 13W GU24 120V LED 16W LED 120V, 1600 lumens |

Gleem 16:

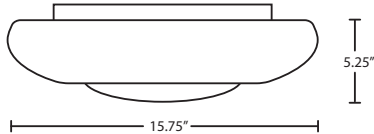

| FIXTURE/DECOR | LAMP OPTIONS |
|--|--|
| GLEEM16CLC 15.75" Opal Glossy/Clear | (blank) 3x 60W A19 Incan GU24 3x 13W GU24 120V LED 20W LED 120V, 2200 lumens |

Ex. GLEEM12CLC
Gleem 12 Ceiling, Clear Glass,
Satin Nickel Finish

Project Information: