

ANDI

12V SPOTLIGHTS

SPECIFICATIONS:

DESCRIPTION

Low voltage spotlight with handcrafted glass. Includes Quick-Connect jack.

LAMPING

Standard: 35W Shielded flood 12V halogen MR11 lamp, included. **LED:** 3W Replaceable source, dimmable, 90+ CRI, 3000°K CCT, 300 lumens, 30,000 hours, lamp included.

DIFFUSER

Shade shall be handcrafted glass of various decors. Diameter of 2.625" and height of 2.75" **Opening sizes:** 24mm.

QUICK-CONNECT JACK

Integral Quick-Connect jack is compatible with Besa Rail Adapter.

ELEMENT OPTIONS

Refer to next page. Available as either a Quick-Connect element only or with Rail Adapter for use with Besa Monorail. Longer stem options are also available.

METAL FINISH


Available in Bronze or Satin Nickel.


LABELS

UL or ETL Listed. Suitable for Dry Locations (interior use only).



ANDI IN BICOLOR ORANGE/PINA & BICOLOR GREEN/YELLOW



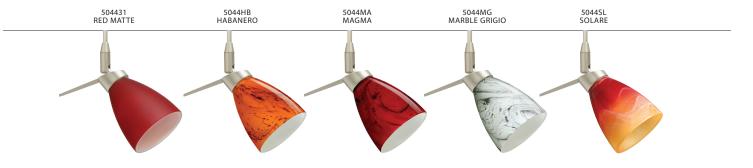

For ordering information, see next page

All dimensions provided are nominal. Allowance must be made for dimensional tolerance in handcrafted glasses. location:



ORDERING:

QUICK-CONNECT -	SHADE OPTIONS	- LAMP OPTIONS	- STEM OPTIONS - METAL FINISH
SP Jack Only	504431 Red Matte	(blank) 35W Hal MR11	(blank) Standard BR Bronze
RSP Rail-Ready	5044GY Bicolor Green/Yellow	LED 3W LED	06 6" SN Satin Nickel
	5044HB Habanero		12 12″
	5044MA Magma		18 18″
	5044MG Marble Grigio		
	50440P Bicolor Orange/Pina		Ex. SP-5044SL-SN
	5044SL Solare		Andi Spotlight w/ Solare Glass,
			Satin Nickel Finish

SPOTLIGHT OPTIONS:

SP SPOTLIGHT ELEMENT ONLY



- Spotlight Fixture with Shade
- Quick-Connect Jack integral
- Compatible with Besa Canopies and Rail Adapter

RSP SPOTLIGHT + RAIL ADAPTER



- **READY FOR RAIL**
- Spotlight Fixture with Shade, plus Rail Adapter

Std

¢

- - Quick-Connect Jack integral Compatible with Besa Monorail System

Longer Stem Options

Besa spotlights have a standard stem 1.5" long. For a spotlight with a longer drop, order a stem length of 6", 12" or 18".

Not suitable for use on sloped ceiling when spotlight is installed on a quick-connect canopy. Note: These are NOT field installable. The complete unit is built at the factory.

- Available options are

- SP06 6" stem adds 3.625" to overall length
 SP12 12" stem adds 9.625" to overall length
 SP18 18" stem adds 15.625" to overall length

Project Information: