



KENO

12V MINI PENDANTS

location:
DRY

SPECIFICATIONS:

DESCRIPTION

Our Keno begins with clear blown glass, with a bull-nosed shape and glossy outer finish. We then, using a handcrafting technique, carefully apply a band of actual fine-grained sand to the inner surface of the glass, where white colour is fully saturated into the coating for a bold statement. A final clear protective coating is applied to seal and preserve the accent material. The result is a beautifully textured work of art, comfortable with the irony of sand being applied to a glass that originates from sand. When illuminated, the colors shimmers through the noticeable refractions created by every granule, as the sand patterning is obvious and pleasing.

LAMPING

Standard: 35W MAX GY6.35 base, T-shape lamp. Dimmable with ELV Dimmer (not included).

LED: 3W Replaceable 12V LED, 90+ CRI, 3000°K CCT, 300 lumens, 25,000 hours. Lamp included. Dimmable with ELV Dimmer (not included).

DIFFUSER

Diffuser shall be made of glass with inner sand coating and gloss outer finish in various decors. 4.25" Dia. x 3" H

CORD

Standard cord is 10' field-adjustable coaxial type with teflon jacket and decorative sleeve at the socketholder. Jacket tint coordinates with metal finish. Cords also available in 15' lengths.

STANDARD PENDANT (1XC, 1XT, X)

Mini pendant comes complete with either dome-style or flat-style canopy. See next page for multi light options with "X" prefix.

QUICK-CONNECT OPTION (XP, RXP)

Quick-Connect Jack is compatible with Besa Rail Adapter or Besa Track Adapter (Type L, H or J)

METAL FINISH


Glass retainer hardware, sleeve and Quick-Connect Jack and/or canopies are finished in either Black, Bronze or Satin Nickel.

MOUNTING

Installs directly to a 4" octagonal ceiling box. Suitable for sloped ceilings.

LABELS

UL or ETL Listed. Suitable for Dry Locations (interior use only).



GOLD SAND (KENOGD), WHITE SAND (KENOWH) & SMOKE SAND (KENOSM)
WITH BLACK FINISH

Project Information:

For ordering information, see next page

All dimensions provided are nominal.
Allowance must be made for dimensional tolerance in handcrafted glasses.

QT Series 12V Track Adapter

- Slim profile adapter connects quick-connect elements to 120V track systems.
- Black or White finish
- For use with Besa 12V Mini Pendants (XP), including LED type
- **Ordering:**

QTH-12-BK/WH - Black or White
QTJ-12-BK/WH - Black or White
QTL-12-BK/WH - Black or White



REV 9/25



ORDERING:

CONNECTION	SHADE OPTIONS	LAMP OPTIONS	METAL FINISH	OPTIONS
Quick-Connect	KENOGD Gold Sand	(blank) Bipin socket	BK Black	L 15' cord
XP Jack Only	KENOSM Smoke Sand	LED 3W LED	BR Bronze	277 277V
RXP Rail-Ready	KENOWH White Sand		SN Satin Nickel	DIM010 0-10V Dimming


Pendant Fixtures

1XC Dome Canopy

1XT Flat Canopy

Multi light

X For Multi light Canopy




Multilight Canopies Available, see right


Ex. 1XT-KENOSM-LED-SN
Keno Pendant, Smoke Sand Glass Shade, Satin Nickel Finish

MULTIPOINT CANOPY OPTIONS FOR CORD PENDANTS


T23X 3 LIGHT ROUND CANOPY




T23XL 3 LIGHT LARGE ROUND CANOPY

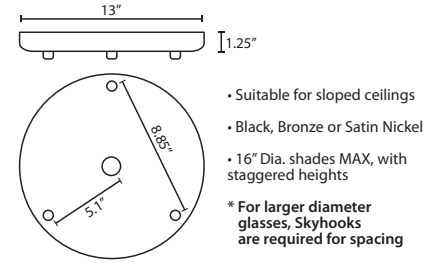


T26X 6 LIGHT ROUND CANOPY

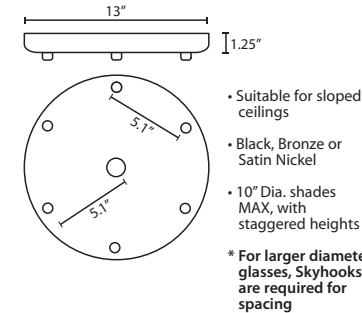


T29X 9 LIGHT ROUND CANOPY

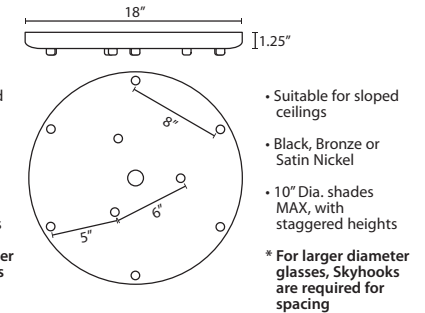


T28S 8 LIGHT SQUARE CANOPY

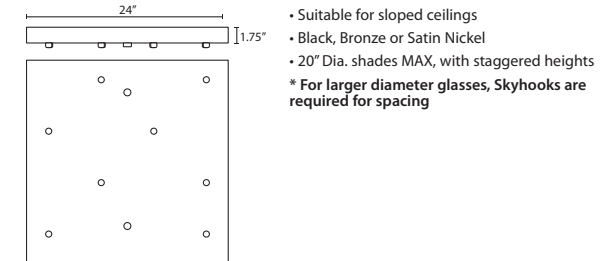


T23V 3 LIGHT BAR CANOPY



T24V 4 LIGHT BAR CANOPY



T27V 7 LIGHT BAR CANOPY

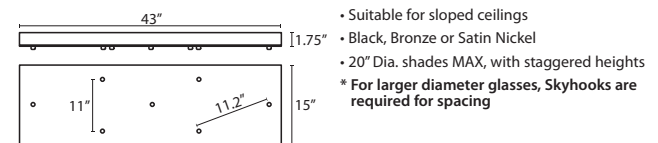


QUICK-CONNECT OPTIONS:

XP PENDANT ELEMENT ONLY



- Pendant Shade and Cord/Socket Set
- 10' Field-adjustable braided coaxial-type cord with a teflon jacket (clear or bronze tint coordinates with metal finish)
- Quick-Connect Jack provided
- Compatible with Besa Canopies and Rail Adapter
- Black, Bronze or Satin Nickel metal finishes


RXP PENDANT + RAIL ADAPTER



- READY FOR RAIL**
- Pendant Shade and Cord/Socket Set, plus Rail Adapter
- 10' Field-adjustable braided coaxial-type cord with a teflon jacket (clear or bronze tint coordinates with metal finish)
- Quick-Connect Jack provided
- Compatible with Besa Monorail Systems or Besa Track Adapter (Type L, H or J)
- Black, Bronze or Satin Nickel metal finishes


FIXED PENDANT OPTIONS:

1XC 1 LIGHT PENDANT, DOME CANOPY



- NO CORD CUTTING REQUIRED**
- Suitable for use on sloped ceilings
- 1x electronic 60W dimmable 120V transformer
- Installs to standard 4" octagonal junction box
- Black, Bronze or Satin Nickel metal finishes

1XT 1 LIGHT PENDANT, FLAT CANOPY



- Suitable for use on sloped ceilings
- 1x electronic 60W dimmable 120V transformer, fits partially in junction box
- Installs to standard 4" octagonal junction box
- Black, Bronze or Satin Nickel metal finishes

X 1 LIGHT PENDANT FOR MULTIPOINT CANOPIES



- Suitable for use on sloped ceilings
- 1x electronic 60W dimmable 120V transformer, fits partially in junction box
- Installs to standard 4" octagonal junction box
- Black, Bronze or Satin Nickel metal finishes

ADDITIONAL OPTIONS:

277V:
For 277V option, add an "277" to the end of the item number, i.e. 1XT-174352-SN-277.

0-10V Dimming:
For 0-10V Dimming option, add an "DIM010" to the end of the item number, i.e. 1XT-174352-SN-DIM010.

15Ft. CORD LENGTH:
For longer 15' cord, add an "L" to the end of the item number, i.e. 1XT-174352-SNL.

HOW TO ORDER A MULTILIGHT FIXTURE

Order your canopy with the selected 12V multi light pendants (indicated by "X" prefix) for the complete fixture:

Example: 1x T23XL-LED-SN (3 Light Large Round LED Canopy)

1x X-KENOSM-SN (Keno Pendant in Smoke Sand)

1x X-KENOWH-SN (Keno Pendant in White Sand)

1x X-KENOGD-SN (Keno Pendant in Gold Sand)