

TIMO 6

12V MINI PENDANTS

SPECIFICATIONS:

DESCRIPTION

Low voltage mini pendant with glass diffuser and metal cap.

LAMPING

LED: 9W Replaceable 12V LED MR16, dimmable, 80+ CRI, 3000°K CCT, 525 lumens, 25,000 hours. Lamp included. Dimmable with ELV Dimmer.

DIFFUSER

Conical shade shall be clear or smoke glass with opaque white or black top. 6" Dia. x 8.5" H

CORD

Standard cord is 10' field-adjustable coaxial type with teflon jacket and decorative sleeve at the socketholder. Jacket tint coordinates with metal finish. Cords also available in 15' lengths.

STANDARD PENDANT (1XC, 1XT, X)

Mini pendant comes complete with either dome-style or flat-style canopy. See next page for multi light options with "X" prefix.

QUICK-CONNECT OPTION (XP, RXP)

Quick-Connect Jack is compatible with Besa Rail Adapter.

METAL FINISH


Glass retainer hardware, sleeve and Quick-Connect Jack and/or canopies are finished in either Black, Bronze or Satin Nickel.

MOUNTING

Installs directly to a 4" octagonal ceiling box. Suitable for sloped ceilings.

LABELS

UL or ETL Listed. Suitable for Dry Locations (interior use only).



TIMO6WS

SMOKE/WHITE

Project Information:

For ordering information, see next page

All dimensions provided are nominal. Allowance must be made for dimensional tolerance in handcrafted glasses.



TIMO 6 IN SMOKE/BLACK (TIMO6BS) WITH BLACK FINISH & CLEAR/WHITE (TIMO6WC)

TIMO6BC


CLEAR/BLACK

REV 8/22

location DRY



BESALIGHTING

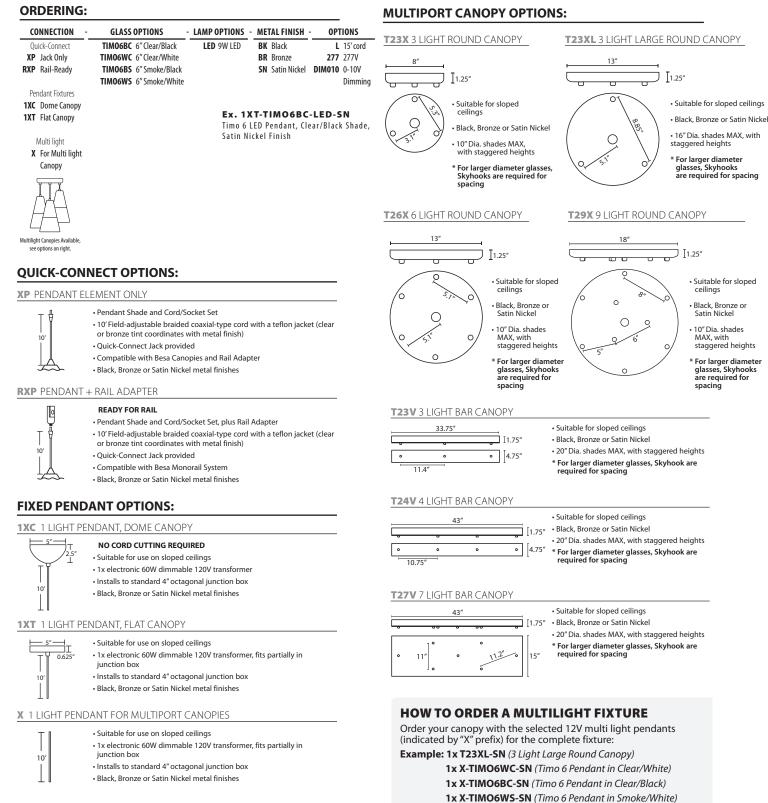

ADDITIONAL OPTIONS:

277V:

For 277V option, add an "**277**" to the end of the item number, i.e. 1XT-174352-SN-**277**.

0-10V Dimming:

For 0-10V Dimming option, add an "DIM010" to the end of the item number, i.e. 1XT-174352-SN-DIM010.

CORD LENGTH OPTIONS:

For longer 15' cord, add an "L" to the end of the item number,

15Ft. CORD LENGTH:

i.e. 1XT-174352-SNL.