



LANDO

FLUSH MOUNT CEILING

location:
DAMP

SPECIFICATIONS:

DESCRIPTION

The Lando Ceiling is composed of a broad glass shade, with a classic fluted vertical pattern blown throughout the glass. The interesting play of shimmering light through the lower clear surface makes for a striking affect, complemented by the subtle halo of uplight.

LAMPING

Standard: 75W A19 120V incandescent, lamp not included. Dimmable with standard incandescent dimmer (not included).

LED: 9W Replaceable source, 120V, dimmable, 90+ CRI, 3000°K CCT, 800 lumens, 30,000 hours. Lamp included.

DIFFUSER

Handcrafted glass diffuser in Black or White decors with Clear bottom.
4.5" Dia. x 7" H

CONSTRUCTION



Canopy (5" dia.) is plated stamped steel with glass retainer hardware.

MOUNTING

Installs directly to a 4" octagonal outlet box, centered on fixture. 90°C supply wire required for incandescent lamping.

LABELS

UL or ETL Listed. Suitable for Damp Locations (interior use only)

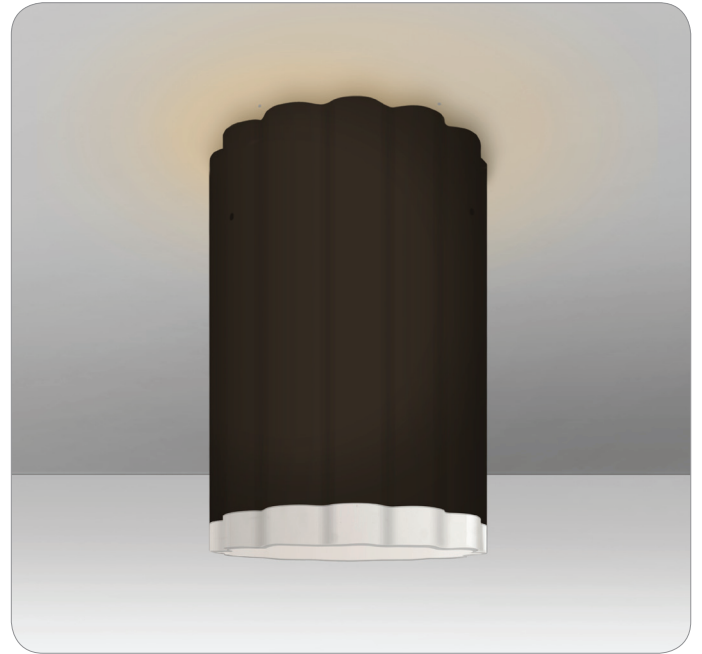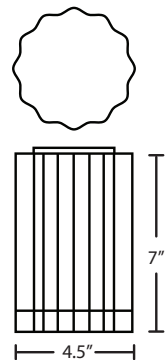

LANDOBKC (BLACK/CLEAR)

LANDOWHC
WHITE/CLEAR



ORDERING:

FIXTURE/DECOR	-	LAMP OPTIONS
LANDOBKC Black/Clear		(blank) 75W A19 Incan
LANDOWHC White/Clear		LED 9W LED

Ex. LANDOWHC
Lando Ceiling, White/Clear Shade

Project Information:

All dimensions provided are nominal.
Allowance must be made for dimensional tolerance in handcrafted glasses.