

INSTALLATION GUIDE

Model 1KM Series (Three Light Med. Base Ceiling 120V)



BESA LIGHTING

6695 Taylor Rd. Blacklick, OH 43004
www.besalighting.com


1KM.01, Rev.2 8-10

Caution: Turn off power to electrical box before installing


1. Carefully unpack parts. Loosen Screws (F) to release the Mounting Plate (A) from Canopy (E).
2. Secure the Mounting Plate (A) to the Electrical Supply Box with Machine Screws (B) provided.
3. Attach the fixture Ground wire to the supply ground and secure with Wire Nut Connector (C).
4. Connect the fixture conductors to the supply conductors with Wire Nut Connectors (D) as shown: White fixture wire to white supply wire and black fixture wire to black supply wire. Carefully push wires and wire nuts back into outlet box.
5. Position the Canopy (E) over the Mounting Plate and secure by tightening the Screws (F).
6. Install the Extension Rods (G) first, then secure Glass (H) with the Decorative Fasteners (I).
7. Using the Leveling Screws (J), adjust the Glass (H) until it appears level.
8. Insert bulb(s) of indicated type and of no greater wattage than marked on fixture. Do not exceed wattage.

**Note: The following steps are for the 8" tall glass.
For the 12" tall glass, see the instructions below.**

9. The Bottom Glass Diffuser (M) is to be secured to the Threaded Swivel (L). Use the Washer (O) on the inside of the Diffuser, then secure with the Decorative Cap Nut (N).
10. Adjust the Bottom Glass Diffuser (M) by using the Threaded Swivel (L) until it appears level.

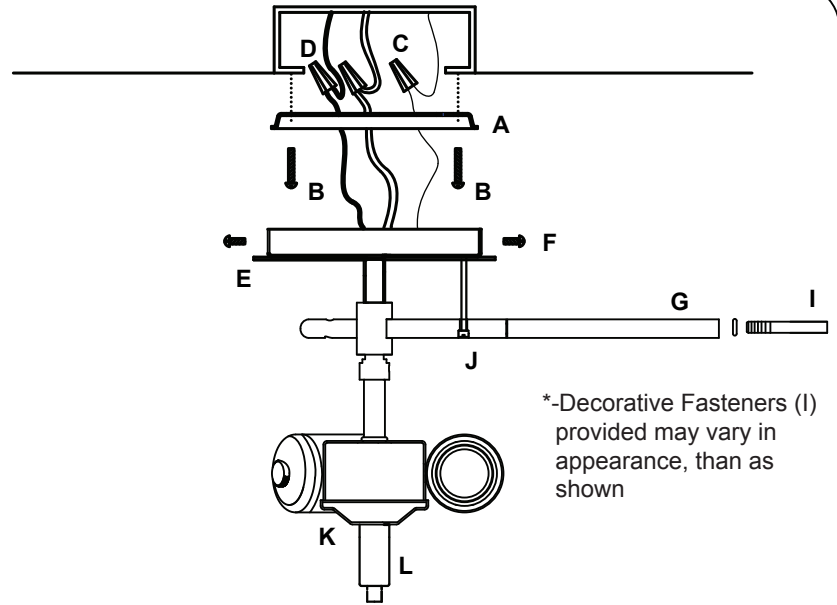

*-Decorative Fasteners (I) provided may vary in appearance, than as shown

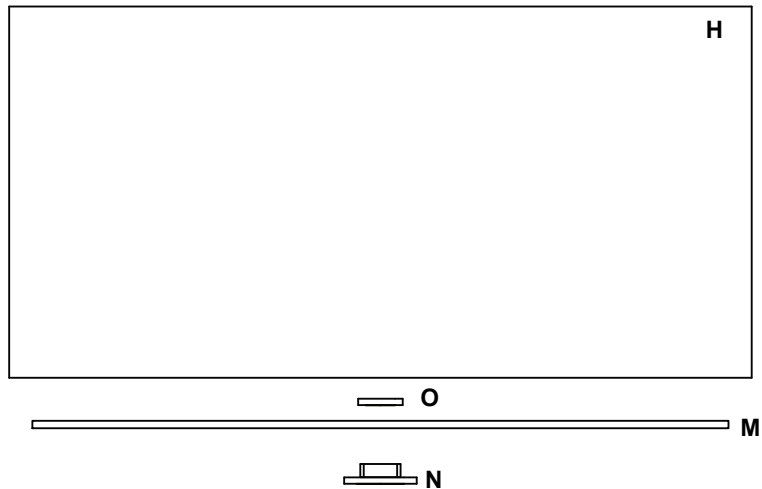

FOR LARGER 12" GLASS, follow steps 1-7 above, then perform the following steps:

9. Remove the Threaded Swivel (L) from the bottom of the Socket Assembly (K), and replace with the Threaded Nipple Extension (P). Secure the Threaded Swivel (L) to the bottom of the Threaded Nipple Extension (P).
10. The Bottom Glass Diffuser (M) is to be secured to the Threaded Swivel (L). Use the Washer (O) on the inside of the Diffuser, then secure with the Decorative Cap Nut (N).
11. Adjust the Bottom Glass Diffuser (M) by using the Threaded Swivel (L) until it appears level.

