

INSTALLATION GUIDE

Model 1KM Series (One Light Med. Base Ceiling 120V)




BESA LIGHTING

6695 Taylor Rd. Blacklick, OH 43004
www.besalighting.com


1KM-Pahu, Rev.1 3-14

Caution: Turn off power to electrical box before installing

1. Carefully unpack parts. Remove the Mounting Plate (A) from the Canopy (B), by unthreading the Cap Nuts (C) from the Threaded Posts (D).
2. Install the provided Mounting Plate to the Outlet Box (E), as shown. Attach the house supply ground wire to the Green Ground Screw on Mounting Plate.
3. Install Socket Assembly (G) to Canopy (B) then Connect the fixture conductors to the house supply conductors with Wire Nut Connectors (F) as shown: White fixture wire to white house supply wire and black fixture wire to house black supply wire. Carefully push wires and wire nuts back into outlet box.
4. Align the openings on the Canopy with the Threaded Posts on the Mounting Plate. Push the Canopy over the Threaded Post until tight to ceiling, then secure with the two Cap Nuts (C).
5. Proceed to glass installation.

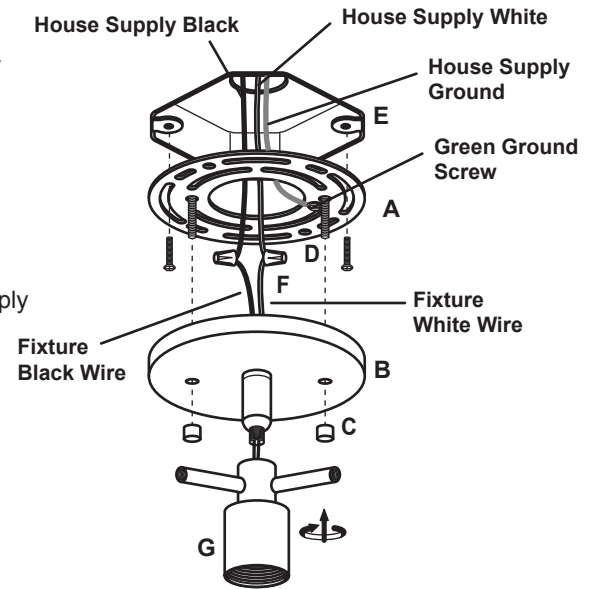

6. Secure Inner Glass Shade (A) first, per Diagram to right using the Glass Holder Rods, then secure Outer Glass Shade (B) using the Decorative Posts.
7. Final balance adjustments, if necessary, can then be made by using the Threaded Swivel until it appears level.
7. Install bulb per label on luminaire.
8. Restore power.

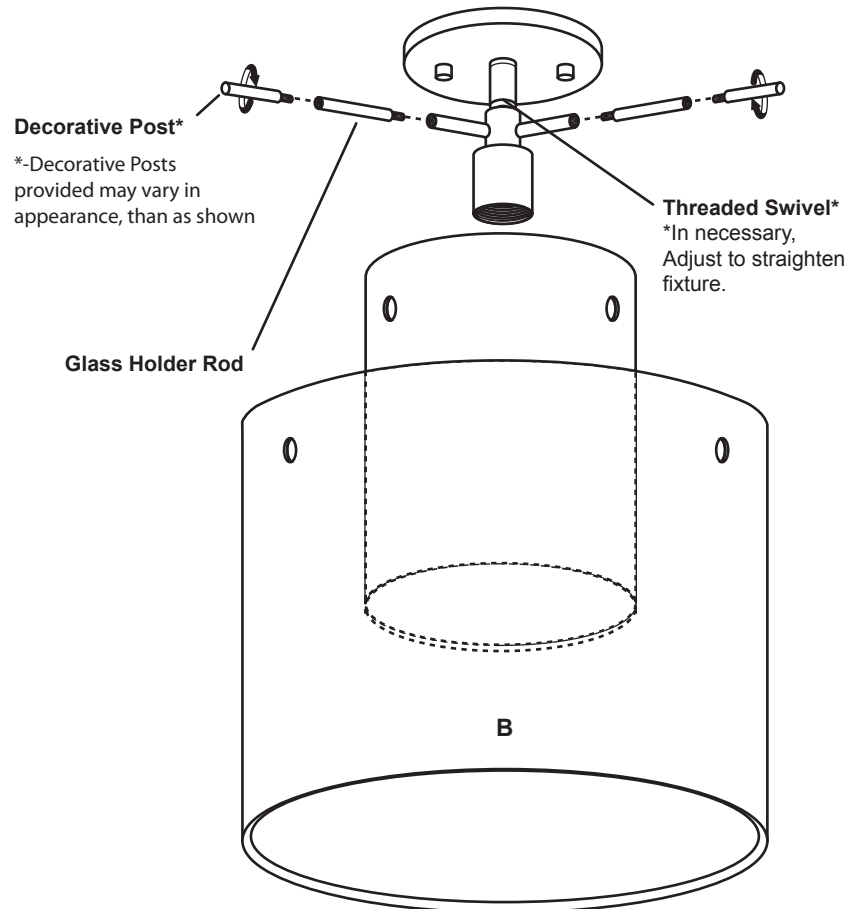

NOTE:

Glass Shade is for instructional purposes.
Actual Glass Shade may vary in size and shape.