

INSTALLATION GUIDE

Model CBL60 Adjustable Cable Support
(For use with Besa low voltage lighting systems only)

CBL60, Rev.3 11-15




BESA LIGHTING


6695 Taylor Rd. Blacklick, OH 43004
www.besalighting.com

INSTALL MOUNTING HARDWARE:


1. Select standoff location and install the supplied anchor into ceiling.
2. Secure the Decorative Cap and Threaded Adapter to ceiling using the supplied Philips screw.

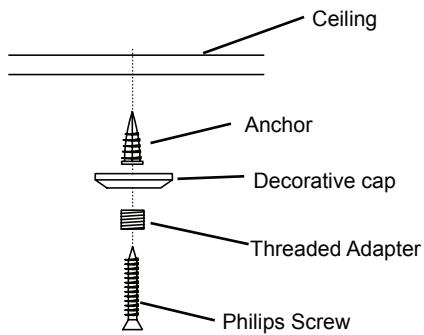

3. Thread the Cable Fitter onto the Threaded Adapter.

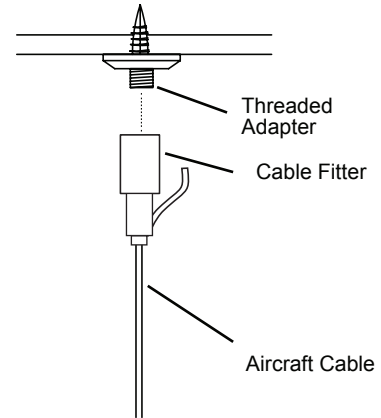

4. Height Adjustment is to be made at the Cable Fitter, by pushing the cable through the Cable Grip. The cable can be pulled back, to lengthen the cable, by compressing the Cable Grip.

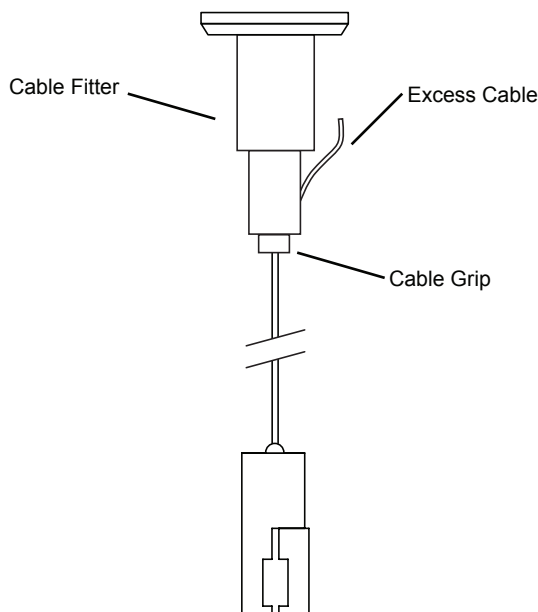

SECURING THE RAIL SECTION:

1. To install the Rail, loosen the Set Screw on the Rail Adapter and lift the Rail into the opening on the Rail Adapter. Tighten the set screw securely.
2. Trim off the Excess Cable from the Cable Fitter

