

BREE 16 / 38



METALWORKS OUTDOOR

location:

SPECIFICATIONS:

DESCRIPTION

Wall-mounted heavy-gauge aluminum sconce. Two sizes available.

ADA-compliant.

LAMPING

Standard: 60W E26 base B10, 120V, lamp not included.

LED: 16W LED source, 120V, CL dimmable, 90+ CRI, 3000°K CCT, 1600 lumens, 30,000 hours, lamp included. (Bree 16 only)

LED: 28W LED source, 120V, CL dimmable, 90+ CRI, 3000°K CCT, 2800 lumens, 30,000 hours, lamp included. (Bree 38 only)

DIFFUSER

White impact-resistant Acrylic diffuser.

CONSTRUCTION

.080" aluminum housing and faceplate, with a bronze, black or silver powder coating. Faceplate is secured by stainless steel screws.


MOUNTING

Installs directly to a 4" octagonal outlet box, centered on fixture. 75°C supply wire required for incandescent lamping.


LABELS

UL or ETL Listed. Suitable for Wet Locations. May be used in Interior or Exterior applications.

METALWORKS LUMINAIRES ARE ASSEMBLED WITH SHEET METAL FABRICATED AND POWDER COATED IN THE USA.

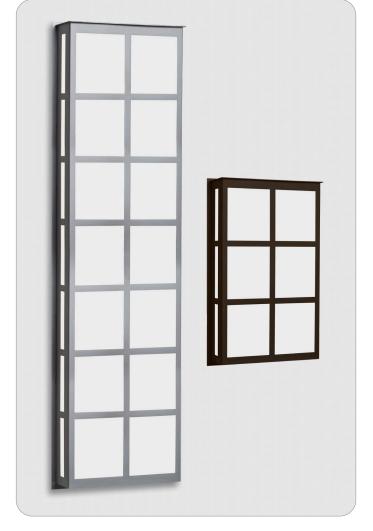

BREE 38 SHOWN IN WHITE ACRYLIC (BREE38-WA-SL) & BREE 16 SHOWN IN WHITE ACRYIC (BREE66-WA-BR) IN BRONZE FINISH




BREE16

For ordering information, see next page



ORDERING:

Bree 16:




FIXTURE -	DIFFUSER	- LAMP OPTIONS	- METAL FINISH
BREE16 Sconce	WA White Acrylic	(blank) 2x 60W B10 Incan	BK Black
		LED 1x 16 WLED 120V,	BR Bronze
		dimmable	SL Silver

Ex. BREE16-WA-SL

2 Lt. Bree 16 Sconce w/ White Acrylic, Silver Finish

Bree 38:



FIXTURE	- DIFFUSER -	- LAMP OPTIONS	- METAL FINISH
BREE38 Sconce	WA White Acrylic	(blank) 3x 60W B10 Incan	BK Black
		LED 1x 28W LED 120V,	BR Bronze
		dimmable	SL Silver

Ex. BREE38-WA-SL

3 Lt. Bree 38 Sconce w/ White Acrylic, Silver Finish

Project Information:		