



# LUMA 18

FLUSH MOUNT CEILING

location:  
**DAMP**

## SPECIFICATIONS:

### DESCRIPTION

Flush-mounted round ceiling luminaires, featuring handcrafted glass.

### LAMPING

**Standard:** 60W A19 120V incandescent, lamp not included. Dimmable with standard incandescent dimmer (not included).

**LED:** 28W Integrated source, 120V, CL dimmable, 90+ CRI, 3000°K CCT, 2160 lumens, 30,000 hours, included. (For Luma 18 only)

### DIFFUSER

Handcrafted glass diffuser is available in Opal Glossy/Clear decor. 17.25" Dia. x 4.75" H

### CONSTRUCTION

Glass diffuser is secured to fitter with "twist & lock" bayonet action. Stamped aluminum fitter is powder coated white.

### MOUNTING

Installs directly to a 4" octagonal outlet box, centered on fixture. 90°C supply wire required for incandescent lamping.

### LABELS

UL or ETL Listed. Suitable for Damp Locations (interior use only).




LUMA CEILING SHOWN IN OPAL GLOSSY/CLEAR



Twist and lock bayonet glass

Luma 18: #9097

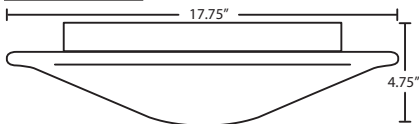

FIXTURE	DECOR	LAMP OPTIONS	OPTIONS
3CS 17.75" Dia.	909739 Opal Glossy/Clear	(blank) 3x 60W A19 Incan LED 28W LED, 2160 lumens	LW Low Wattage labeling

**Ex. 3CS-909739**

Luma 18 Ceiling w/ Opal Glossy/Clear Glass

**Project Information:**

All dimensions provided are nominal. Allowance must be made for dimensional tolerance in handcrafted glasses.

REV 8/21