



# NIMBUS 10 / 16

FLUSH MOUNT



Location:  
**DAMP**

## SPECIFICATIONS:

### DESCRIPTION

Flush-mounted ceiling or **ADA-Compliant** wall fixture, featuring a low-profile toroid-shaped opal glass diffuser.

### LAMPING

**Nimbus 10:** 23W integrated source, 120V, dimmable, 90+ CRI, 3000°K CCT, 2065 lumens, 25,000 hours, included.

**Nimbus 16:** 34W integrated source, 120V, dimmable, 90+ CRI, 3000°K CCT, 2995 lumens, 25,000 hours, included.

### DIFFUSER

Handcrafted of glass in Opal Matte decor.

**Nimbus 10:** 9.75" Dia. x 2.25" H

**Nimbus 16:** 16.5" Dia. x 3" H

### CONSTRUCTION

Fabricated aluminum fitter in powder coated white finish.

### MOUNTING


Installs directly to a 4" octagonal outlet box, centered on fixture.

### LABELS

UL or ETL Listed. Suitable for Damp Locations (interior use only).




OPAL MATTE (NIMBUS1007C)

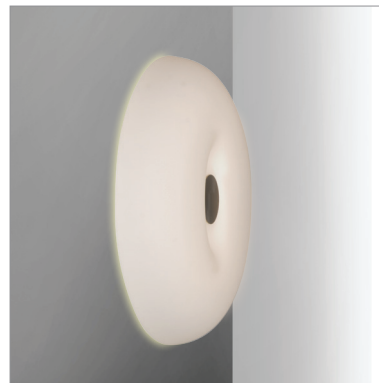


\*Can be used as ADA-compliant wall sconce as shown above


Nimbus 10 Ceiling:




Nimbus 10 Wall:



Nimbus 16 Ceiling:



Nimbus 16 Wall:



Nimbus 10 Flush Mount:

FIXTURE	- LAMP OPTIONS -	METAL FINISH
<b>NIMBUS1007C</b> Opal Matte	<b>LED</b> 23W LED, 2065 lumens	<b>BK</b> Black <b>BR</b> Bronze <b>SN</b> Satin Nickel

Nimbus 16 Flush Mount:

FIXTURE	- LAMP OPTIONS -	METAL FINISH
<b>NIMBUS1607C</b> Opal Matte	<b>LED</b> 34W LED, 2995 lumens	<b>BK</b> Black <b>BR</b> Bronze <b>SN</b> Satin Nickel

**Ex. NIMBUS1607C-LED-SN**

Nimbus 16 Ceiling, Opal Matte Shade

**Project Information:**

All dimensions provided are nominal. Allowance must be made for dimensional tolerance in handcrafted glasses.