



SAIL 17

SCONCES OUTDOOR

ADA

COMPLIANT

location:
WET

SPECIFICATIONS:

DESCRIPTION

Wall-mounted **ADA-compliant** sconce featuring handcrafted glass.

LAMPING

Standard: 2x 40W B10 120V incandescent, lamp not included. Dimmable with standard incandescent dimmer (not included).

LED: 2x 8W Replaceable LED source, 120V, dimmable, 90+ CRI, 3000°K CCT, 800 lumens, 30,000 hours, lamp included. (For Opal only)

LED Filament: 2x 5W Replaceable LED Filament lamp, 120V, dimmable, 2200°K CCT, 540 lumens, 15,000 hours, lamp included. (For Bubble only)

DIFFUSER

Diffuser shall be handcrafted Opal Matte or Bubble glass with a decorative faceplate and aluminum fitter.

CONSTRUCTION


Stamped aluminum fitter is powder coated white. Glass is secured by stainless steel set screws.

MOUNTING

Installs directly to a 4" octagonal outlet box. 75°C supply wire required for incandescent lamping. Fixture is centered on the outlet box. Wall mount only.

LABELS

UL or ETL Listed. Suitable for Wet Locations (interior or exterior use).

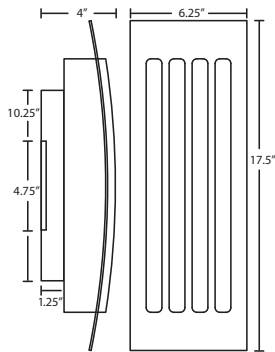


ORDERING:

FIXTURE	LAMP OPTIONS	METAL FINISH
SAIL17BB Bubble glass w/ decorative faceplate	(blank) 2x 40W B10 Incan EDIL 2x 5W LED Filament (For Bubble Only)	BR Bronze BK Black SL Silver
SAIL17SW Opal glass w/ decorative faceplate		
SAIL17SM Smoke Bubble glass w/ decorative faceplate		

Ex. SAIL17SW-BR
Sail 17 Sconce w/ Opal Glass
with Bronze Faceplate,


Project Information:

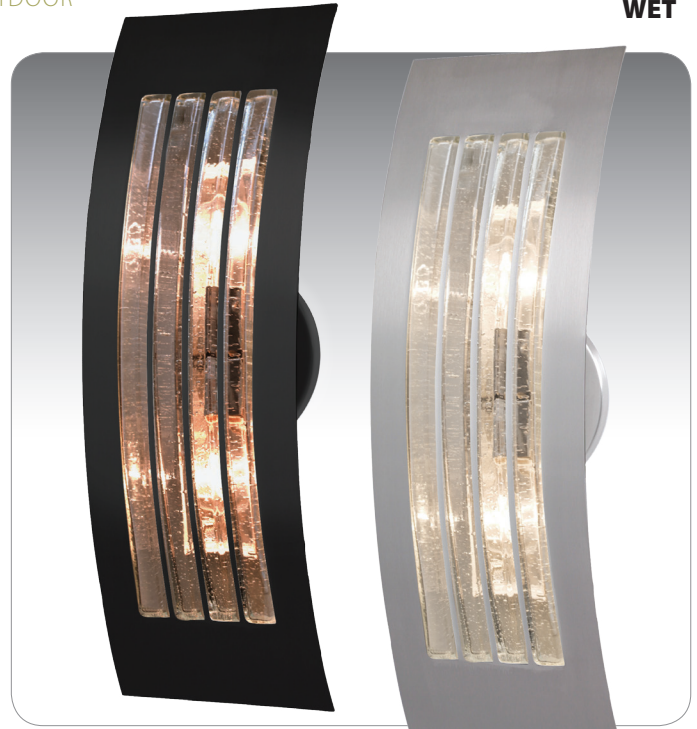

SAIL 17 SHOWN IN SMOKE BUBBLE (7855SM-BK)
& SAIL 17 SHOWN IN BUBBLE/SILVER (SAIL17BB-SL)

SAIL17SW-BR
OPAL/BRONZE

SAIL17SW-BK
OPAL/BLACK

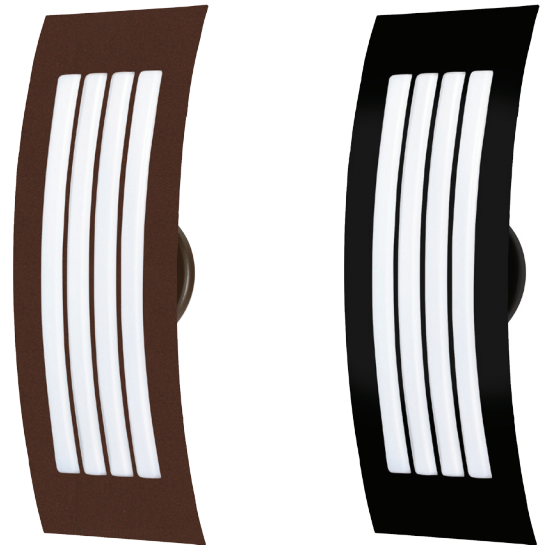

All dimensions provided are nominal.
Allowance must be made for dimensional tolerance in handcrafted glasses.

REV 12/18