

# INSTALLATION GUIDE

Spotlight Element Model QF3

(For use with Besa low voltage lighting systems only)

QF3, Rev.5 7-13



**BESA** LIGHTING

6695 Taylor Rd. Blacklick, OH 43004  
www.besalighting.com


**IMPORTANT: READ ALL INSTRUCTIONS BEFORE INSTALLING.  
DISCONNECT POWER BEFORE INSTALLING OR RE-LAMPING.**

## INSTALLING LAMP

1. Insert the lamp into the socket assembly by aligning the pins with the socket holes, and gently pushing until the lamp seats and is secured by the lamp clip.


Use a 12-volt MR16 Shielded (glass covered lamp)  
50-watt max.

**NOTE:** Fixture shown is for instructional purposes, stem length may vary.

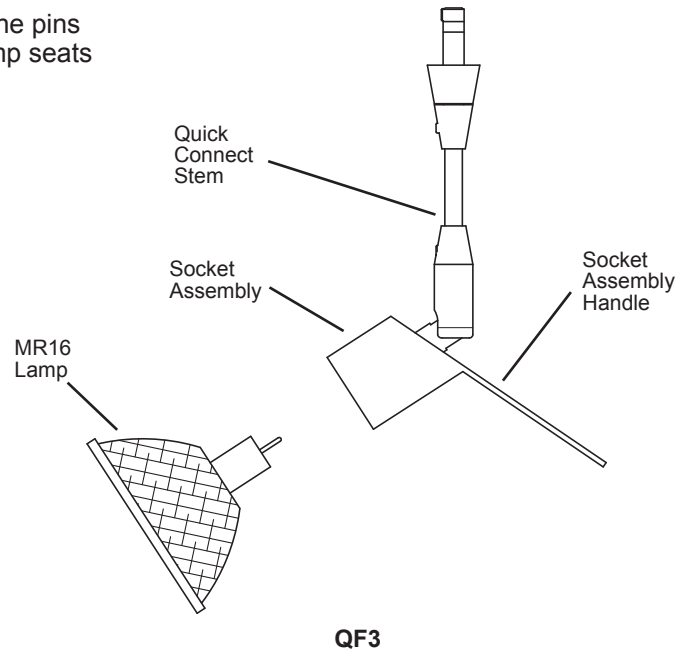

## INSTALLING THE QUICK CONNECT:

1. Insert the post of the quick connect into the quick connect adapter.
2. Thread the top half of the conical section until it seats with the adapter.
3. Adjust fixture position; use caution not to loosen the conical section.

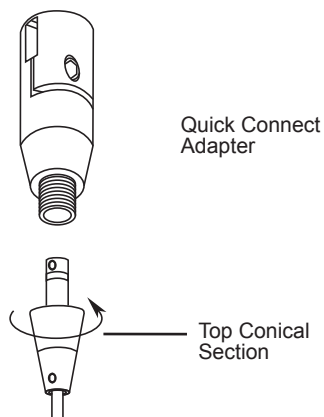

## ADJUSTMENT OF THE SPOTLIGHT ANGLE:

1. While holding the quick connect stem, orient the spotlight to the desired angle using the socket assembly handle.

Low voltage systems operate at higher amperage, which requires secure connections. A loose or bad connection can lead to overheating, so it is advised to check the connections after the first 1/2 hour of operation. If the connection is hot to the touch, remove the spotlight then reinstall securely.