



# CAFE 12 / 18

12V MINI PENDANTS

location:  
**DRY**

## SPECIFICATIONS:

### DESCRIPTION

Low voltage mini pendant with tubular glass shades.

### LAMPING

**Standard:** 50W Shielded flood 12V halogen MR16 lamp, included. Suitable for use in an open fixture. Dimmable with ELV Dimmer.

**LED:** 9W Replaceable 12V LED MR16, dimmable, 80+ CRI, 3000°K CCT, 525 lumens, 25,000 hours. Lamp included. Dimmable with ELV Dimmer.

### DIFFUSER

Shade shall be handcrafted glass of various decors.

**12:** 2.375" Dia. x 12" H, **18:** 2.375" Dia. x 18" H

### CORD

Standard cord is 10' field-adjustable coaxial type with teflon jacket and decorative sleeve at the socketholder. Jacket tint coordinates with metal finish. Cords also available in 15' lengths.

### STANDARD PENDANT (1XC, 1XT, X)

Mini pendant comes complete with either dome-style or flat-style canopy.

### QUICK-CONNECT OPTION (XP, RXP, 1XP)


Quick-Connect Jack is compatible with Besa Rail Adapter, or Quick-Connect canopies (order separately).

### METAL FINISH

Glass retainer hardware, sleeve and Quick-Connect Jack and/or canopies are finished in either Bronze or Satin Nickel.

### LABELS

UL or ETL Listed. Suitable for Dry Locations (interior use only).

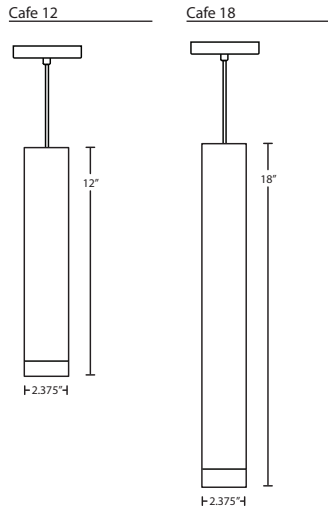

CAFE12BF (BLACK/INNER FROST FOIL) & CAFE18WF (WHITE/INNER FROST FOIL)

CAFE18BF  
BLACK/INNER FROST FOIL

CAFE12WF  
WHITE/INNER FROST FOIL



**Project Information:**

**For ordering information, see next page**

All dimensions provided are nominal. Allowance must be made for dimensional tolerance in handcrafted glasses.

REV 2/21



ORDERING:

CONNECTION	GLASS OPTIONS	LAMP OPTIONS	METAL FINISH	OPTIONS
Quick-Connect	<b>CAFE12BF</b> 12" Black/Frost	<b>(blank)</b> 50W Hal	<b>BR</b> Bronze	<b>L</b> 15' cord
<b>XP</b> Jack Only	<b>CAFE12WF</b> 12" White/Frost	<b>LED</b> 9W LED	<b>SN</b> Satin Nickel	<b>277</b> 277V
<b>RXP</b> Rail-Ready	<b>CAFE18BF</b> 18" Black/Frost			<b>DIM010</b> 0-10V Dimming
<b>1XP</b> Flat Canopy	<b>CAFE18WF</b> 18" White/Frost			

Pendant Fixtures

- 1XC** Dome Canopy
- 1XT** Flat Canopy

**Ex. 1XT-CAFE12BF-SN**  
Cafe 12 Pendant w/ Black/Frost Glass,  
Satin Nickel Finish

Multi light


**X** For Multi light Canopy



Multi-light Canopies Available, see catalog page. 77


QUICK-CONNECT OPTIONS:

**XP** PENDANT ELEMENT ONLY




- Pendant Shade and Cord/Socket Set
- 10' Field-adjustable braided coaxial-type cord with a teflon jacket (clear or bronze tint coordinates with metal finish)
- Quick-Connect Jack provided
- Compatible with Besa Canopies and Rail Adapter
- Bronze or Satin Nickel metal finishes

**RXP** PENDANT + RAIL ADAPTER



- READY FOR RAIL**
- Pendant Shade and Cord/Socket Set, plus Rail Adapter
  - 10' Field-adjustable braided coaxial-type cord with a teflon jacket (clear or bronze tint coordinates with metal finish)
  - Quick-Connect Jack provided
  - Compatible with Besa Monorail System
  - Bronze or Satin Nickel metal finishes


**1XP** PENDANT + MONOPOINT FLAT CANOPY



- Pendant Shade and Cord/Socket Set, plus Flat Canopy
- 1x electronic 60W dimmable transformer, fits partially in junction box
- 10' Field-adjustable braided coaxial-type cord with a teflon jacket (clear or bronze tint coordinates with metal finish)
- Quick-Connect Jack provided
- Integral Quick-Connect adapter
- Bronze or Satin Nickel metal finishes


FIXED PENDANT OPTIONS:

**1XC** 1 LIGHT PENDANT, DOME CANOPY




- NO CORD CUTTING REQUIRED**
- Suitable for use on sloped ceilings
  - 1x electronic 60W dimmable 120V transformer
  - Installs to standard 4" octagonal junction box
  - Bronze or Satin Nickel metal finishes

**1XT** 1 LIGHT PENDANT, FLAT CANOPY



- Suitable for use on sloped ceilings
- 1x electronic 60W dimmable 120V transformer, fits partially in junction box
- Installs to standard 4" octagonal junction box
- Bronze or Satin Nickel metal finishes


**X** 1 LIGHT PENDANT FOR MULTIPOINT CANOPIES



- Suitable for use on sloped ceilings
- 1x electronic 60W dimmable 120V transformer, fits partially in junction box
- Installs to standard 4" octagonal junction box
- Bronze or Satin Nickel metal finishes


MULTIPOINT CANOPY OPTIONS:

**T23X** 3 LIGHT ROUND CANOPY




- Suitable for sloped ceilings
- Bronze or Satin Nickel
- 10" Dia. shades MAX, with staggered heights

**T23XL** 3 LIGHT LARGE ROUND CANOPY




- Suitable for sloped ceilings
- Bronze or Satin Nickel
- 16" Dia. shades MAX, with staggered heights

**T26X** 6 LIGHT ROUND CANOPY




- Suitable for sloped ceilings
- Bronze or Satin Nickel
- 10" Dia. shades MAX, with staggered heights

**T29X** 9 LIGHT ROUND CANOPY




- Suitable for sloped ceilings
- Bronze or Satin Nickel
- 10" Dia. shades MAX, with staggered heights

**T23V** 3 LIGHT BAR CANOPY




- Suitable for sloped ceilings
- Bronze or Satin Nickel
- 20" Dia. shades MAX, with staggered heights

**T24V** 4 LIGHT BAR CANOPY



- Suitable for sloped ceilings
- Bronze or Satin Nickel
- 20" Dia. shades MAX, with staggered heights

**T27V** 7 LIGHT BAR CANOPY



- Suitable for sloped ceilings
- Bronze or Satin Nickel
- 14" Dia. shades MAX, with staggered heights

HOW TO ORDER A MULTILIGHT FIXTURE

Order your canopy with the selected 12V multi light pendants (indicated by "X" prefix) for the complete fixture:

**Example: 1x T23XL-SN (3 Light Large Round Canopy)**

**1x X-CAFE12BF-SN (Cafe 12 Pendant in Black/Frost)**

**1x X-CAFE12BF-SN (Cafe 12 Pendant in Black/Frost)**

**1x X-CAFE12BF-SN (Cafe 12 Pendant in Black/Frost)**

CORD LENGTH OPTIONS:

15Ft. CORD LENGTH:

For longer 15' cord, add an "L" to the end of the item number, i.e. 1XP-174352-SNL.