



BOCA 3 / 5

12V MINI PENDANTS

location:
DRY

SPECIFICATIONS:

DESCRIPTION

Low voltage mini pendant with glass diffuser.

LAMPING

Standard: 35W MAX GY6.35 base, T-shape lamp. Dimmable with ELV Dimmer (not included).

LED: 3W Replaceable 12V LED, dimmable, 90+ CRI, 3000°K CCT, 300 lumens, 25,000 hours. Lamp included. Dimmable with ELV Dimmer (not included).

DIFFUSER

Globe-shaped shade shall be clear solid formed glass with either bubble or non-bubble décor. The inner portion is frosted to conceal the light source.

Boca 3: 3.15" Dia. x 3" H

Boca 5: 4.0" Dia. x 3.75" H

CORD

Standard cord is 10' field-adjustable coaxial type with teflon jacket and decorative sleeve at the socketholder. Jacket tint coordinates with metal finish. Cords also available in 15' lengths.

STANDARD PENDANT (1XC, 1XT, X)

Mini pendant comes complete with either dome-style or flat-style canopy. See next page for multi light options with "X" prefix.

QUICK-CONNECT OPTION (XP, RXP)

Quick-Connect Jack is compatible with Besa Rail Adapter or Besa Track Adapter (Type L, H or J)

METAL FINISH


Glass retainer hardware, sleeve and Quick-Connect Jack and/or canopies are finished in either Black, Bronze or Satin Nickel.

MOUNTING

Installs directly to a 4" octagonal ceiling box. Suitable for sloped ceilings.

LABELS

UL or ETL Listed. Suitable for Dry Locations (interior use only).

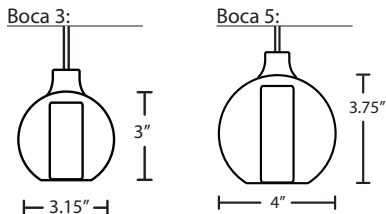

CLEAR (BOCA5CL) WITH BLACK FINISH & CLEAR BUBBLE (BOCA3BB)



BOCA5BB
CLEAR BUBBLE

BOCA3CL
CLEAR

Project Information:

For ordering information, see next page

All dimensions provided are nominal.
Allowance must be made for dimensional tolerance in handcrafted glasses.

QT Series 12V Track Adapter

- Slim profile adapter connects quick-connect elements to 120V track systems.
- Black or White finish
- For use with Besa 12V Mini Pendants (XP), including LED type
- **Ordering:**

QTH-12-BK/WH - Black or White
QTJ-12-BK/WH - Black or White
QTL-12-BK/WH - Black or White



BLACK

WHITE

REV 9/25



ORDERING:

CONNECTION	SHADE OPTIONS	LAMP OPTIONS	METAL FINISH	OPTIONS
Quick-Connect	BOCA3BB 3.15" Bubble	(blank) Bipin socket	BK Black	L 15' cord
XP Jack Only	BOCA3CL 3.15" Clear	LED 3W LED	BR Bronze	277 277V
RXP Rail-Ready	BOCA5BB 4.0" Bubble		SN Satin Nickel	DIM010 0-10V Dimming
	BOCA5CL 4.0" Clear			


Pendant Fixtures

1XC Dome Canopy

1XT Flat Canopy

Multi light

X For Multi light Canopy




Multilight Canopies Available, see see right

Ex. 1XT-BOCA5CL-LED-SN


Boca 5 LED Pendant, Clear Glass Shade, Satin Nickel Finish

MULTIPOINT CANOPY OPTIONS FOR CORD PENDANTS


T23X 3 LIGHT ROUND CANOPY




T23XL 3 LIGHT LARGE ROUND CANOPY

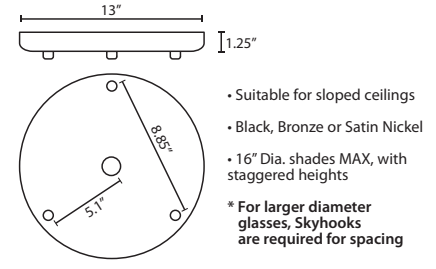


T26X 6 LIGHT ROUND CANOPY

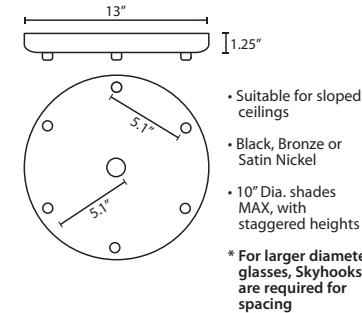


T29X 9 LIGHT ROUND CANOPY

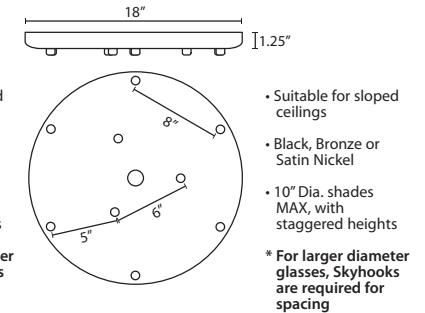


T28S 8 LIGHT SQUARE CANOPY

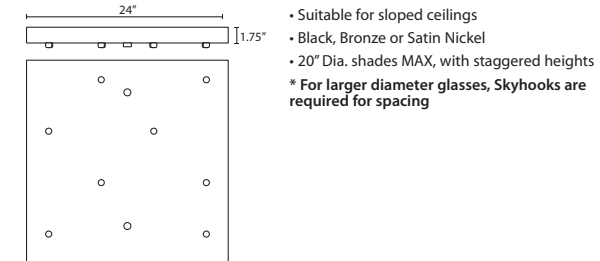


T23V 3 LIGHT BAR CANOPY



T24V 4 LIGHT BAR CANOPY



T27V 7 LIGHT BAR CANOPY

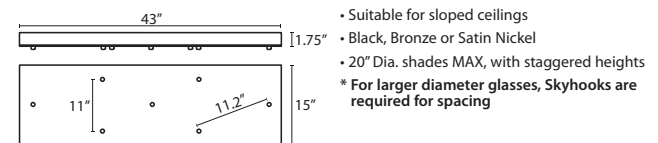


QUICK-CONNECT OPTIONS:

XP PENDANT ELEMENT ONLY



- Pendant Shade and Cord/Socket Set
- 10' Field-adjustable braided coaxial-type cord with a teflon jacket (clear or bronze tint coordinates with metal finish)
- Quick-Connect Jack provided
- Compatible with Besa Canopies and Rail Adapter
- Black, Bronze or Satin Nickel metal finishes


RXP PENDANT + RAIL ADAPTER



- READY FOR RAIL**
- Pendant Shade and Cord/Socket Set, plus Rail Adapter
- 10' Field-adjustable braided coaxial-type cord with a teflon jacket (clear or bronze tint coordinates with metal finish)
- Quick-Connect Jack provided
- Compatible with Besa Monorail Systems or Besa Track Adapter (Type L, H or J)
- Black, Bronze or Satin Nickel metal finishes


FIXED PENDANT OPTIONS:

1XC 1 LIGHT PENDANT, DOME CANOPY



- NO CORD CUTTING REQUIRED**
- Suitable for use on sloped ceilings
- 1x electronic 60W dimmable 120V transformer
- Installs to standard 4" octagonal junction box
- Black, Bronze or Satin Nickel metal finishes

1XT 1 LIGHT PENDANT, FLAT CANOPY



- Suitable for use on sloped ceilings
- 1x electronic 60W dimmable 120V transformer, fits partially in junction box
- Installs to standard 4" octagonal junction box
- Black, Bronze or Satin Nickel metal finishes

X 1 LIGHT PENDANT FOR MULTIPOINT CANOPIES



- Suitable for use on sloped ceilings
- 1x electronic 60W dimmable 120V transformer, fits partially in junction box
- Installs to standard 4" octagonal junction box
- Black, Bronze or Satin Nickel metal finishes

ADDITIONAL OPTIONS:

277V:
For 277V option, add an "277" to the end of the item number, i.e. 1XT-174352-SN-277.

0-10V Dimming:
For 0-10V Dimming option, add an "DIM010" to the end of the item number, i.e. 1XT-174352-SN-DIM010.

15Ft. CORD LENGTH:
For longer 15' cord, add an "L" to the end of the item number, i.e. 1XT-174352-SNL.

HOW TO ORDER A MULTILIGHT FIXTURE

Order your canopy with the selected 12V multi light pendants (indicated by "X" prefix) for the complete fixture:

Example: 1x T23XL-LED-SN (3 Light Large Round LED Canopy)

1x X-BOCA5BB-SN (Boca 5 Pendant in Clear Bubble)

1x X-BOCA5CL-SN (Boca 5 Pendant in Clear)

1x X-BOCA5BB-SN (Boca 5 Pendant in Clear Bubble)