

# FIXTURE INSTALLATION GUIDE

Model J Series (GU24 Base Pendant Set 120V)



BESA LIGHTING

6695 Taylor Rd. Blacklick, OH 43004  
www.besalighting.com


SP097.000.LED, Rev.1 4-20

**IMPORTANT:** For installation of pendants and wiring, please refer to the **Fixture Installation Guide** included with fixture canopy

## Use With these Models:

- Elle 11 (ELLExx)

1. Prior to installing Pendant to Canopy, install Flat Washer, Inner Glass Shade, Decorative Finish Flat Washer onto the Cordset and secure in place with Check Ring.
2. Install Hub Assembly onto the Cordset so it rests on the Check Ring.
3. Install Outer Glass Shade to Cordset by carefully aligning the openings in the Outer Glass Shade to the openings in the Hub Assembly and threading into place with Posts.
4. Install lamp, then install Pendant to Canopy.

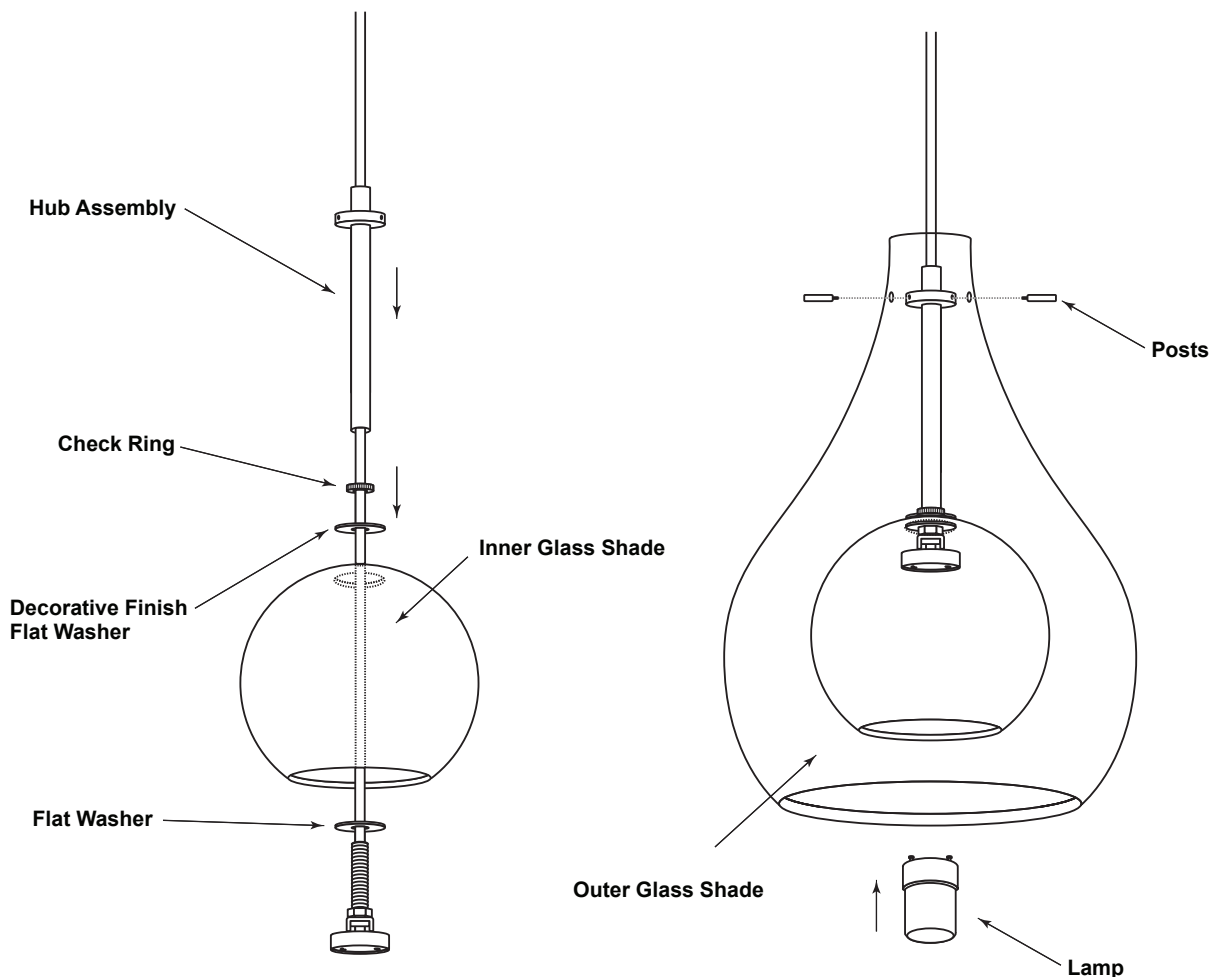

*Besa Lighting Co., Inc. (Besa) warrants to the first end-user purchaser that each Besa product shall be free of defects in material and workmanship for the period of 12 months from the original purchase date by the end user*

**All electrical connections and the installation of this fixture must be in agreement with local codes, ordinances or the NEC (National Electric Code) or CEC (Canadian Electrical Code).**

**Do not connect this fixture to an electrical system that does not provide a means for equipment grounding.**

**Replacement parts for this 120V Voltage Pendant Set are as follows:**

**#SP097.000.LEDSN or BR** - LED cordset with Satin Nickle or Bronze

**Lamps Only**

**#B5553.30** - LED GU24 lamp, 120V