

# MONORAIL KITS WITH SURFACE TRANSFORMERS

 location:  
**DRY**


## SPECIFICATIONS:

### DESCRIPTION

Low voltage Monorail kits, complete with surface-mount power supply and support hardware. Monorail section is field-bendable without tools. 12V AC power output, 120V or 277V input.

### RAIL KIT LENGTHS includes:

- 04 - 4' Rail length, includes: 1x 4' Rail Section, 1x Rigid Standoff, 2x Rail Endcaps
- 08 - 8' Rail length, includes: 1x 8' Rail Section, 3x Rigid Standoff, 2x Rail Endcaps
- 12 - 12' Rail length, includes: 1x 8' Rail Section, 1x 4' Rail Section, 3x Rigid Standoff, 1x Live Rail Connector, 2x Rail Endcaps
- 16 - 16' Rail length, includes: 2x 8' Rail Section, 4x Rigid Standoff, 1x Live Rail Connector, 2x Rail Endcaps
- 20 - 20' Rail length, includes: 2x 8' Rail Section, 1x 4' Rail Section, 5x Rigid Standoff, 3x Live Rail Connector, 2x Rail Endcaps
- 24 - 24' Rail length, includes: 3x 8' Rail Section, 6x Rigid Standoff, 3x Live Rail Connector, 2x Rail Endcaps

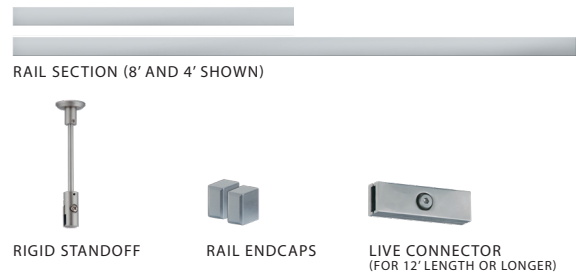

### SURFACE TRANSFORMERS:

- SA60LED** 60W LED Surface Transformer, 120V
- SA60LEDDIM010** 60W LED Surface Transformer, 120V, 0-10V Dimming
- SA105** 105W Surface Transformer, 120V
- SA105LED** 105W LED Surface Transformer, 120V



SATIN NICKEL TRANSFORMER



BLACK TRANSFORMER

For LED power supply, No-load 12V dimmable electronic transformer fits in the junction box. No remote transformer required. *Not recommended for standard halogen-lamped items*

### PENDANTS AND SPOTLIGHTS

Order separately.

### DIMMING

Besa electronic surface transformers are compatible with low voltage electronic dimmers.

### METAL FINISH

Black or Satin Nickel.

### MOUNTING

Transformer canopy installs directly to a 4" octagonal ceiling box. All mounting hardware included. Not suitable for sloped ceilings.

### LABELS

UL or ETL Listed. Suitable for Dry Locations (interior use only).

### ORDERING:

SYSTEM	LENGTH	POWER TRANSFORMER	METAL FINISH
R12 Monorail System	04 4' Length	<b>SA60LED</b> 60W LED Electronic Transformer	<b>BK</b> Black
	08 8' Length	<b>SA60LEDDIM010</b> 60W LED Transformer, 0-10V	<b>SN</b> Satin Nickel
	12 12' Length	<b>SA105</b> 105W Electronic Transformer	
	16 16' Length	<b>SA105LED</b> 105W LED Transformer	
	20 20' Length		
	24 24' Length		

**Ex. R12-08-SA60LED-SN**

8' Monorail kit with 60W LED Surface Transformer in Satin Nickel.

**Project Information:**

All dimensions provided are nominal. Allowance must be made for dimensional tolerance in handcrafted glasses.

**REV 5/24**