



KATIE 10 / 12

FLUSH MOUNT CEILING

location:
DAMP

SPECIFICATIONS:

DESCRIPTION

Flush-mounted round ceiling luminaires, featuring handcrafted glass.
Two sizes available.

LAMPING

Standard: 60W A19 120V incandescent, lamp not included. Dimmable with standard incandescent dimmer (not included).

LED: 10W Integrated source, 120V, CL dimmable, 90+ CRI, 3000°K CCT, 750 lumens, 30,000 hours, included. (For Katie 10 only)

LED: 17W Integrated source, 120V, CL dimmable, 90+ CRI, 3000°K CCT, 1200 lumens, 30,000 hours, included. (For Katie 12 only)

DIFFUSER

Handcrafted ribbed glass diffuser is available in Opal Matte decor.

Katie 10 #945107: 10.5" Dia. x 3.75" H

Katie 12 #945007: 12" Dia. x 4.5" H

CONSTRUCTION

Glass diffuser is secured to fitter with three set screws.

Stamped aluminum fitter is powder coated white.


MOUNTING

Installs directly to a 4" octagonal outlet box, centered on fixture.

90°C supply wire required for incandescent lamping.


LABELS

UL or ETL Listed. Suitable for Damp Locations (interior use only).

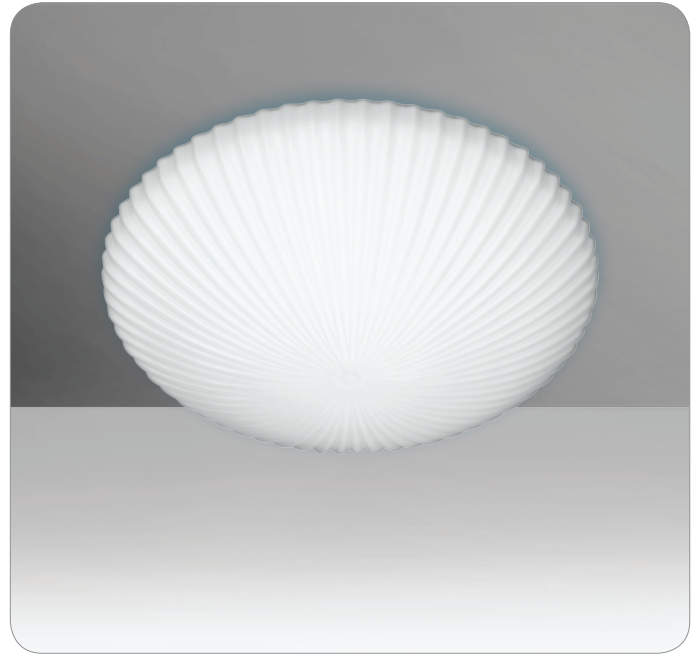


KATIE CEILING SHOWN IN OPAL MATTE

Katie 10: #9451



Katie 12: #9450



DECOR	LAMP OPTIONS	OPTIONS
945107C 10.5" Dia. Opal Matte	(blank) 1x 60W A19 Incan LED 10W LED, 750 lumens	LW Low Wattage labeling

DECOR	LAMP OPTIONS	OPTIONS
945007C 12.0" Dia. Opal Matte	(blank) 2x 60W A19 Incan LED 17W LED, 1200 lumens	LW Low Wattage labeling

Ex. 945007C
Katie 12 Ceiling w/ Opal Matte Glass

Project Information:

All dimensions provided are nominal.
Allowance must be made for dimensional tolerance in handcrafted glasses.